





Electronic Floor Scale

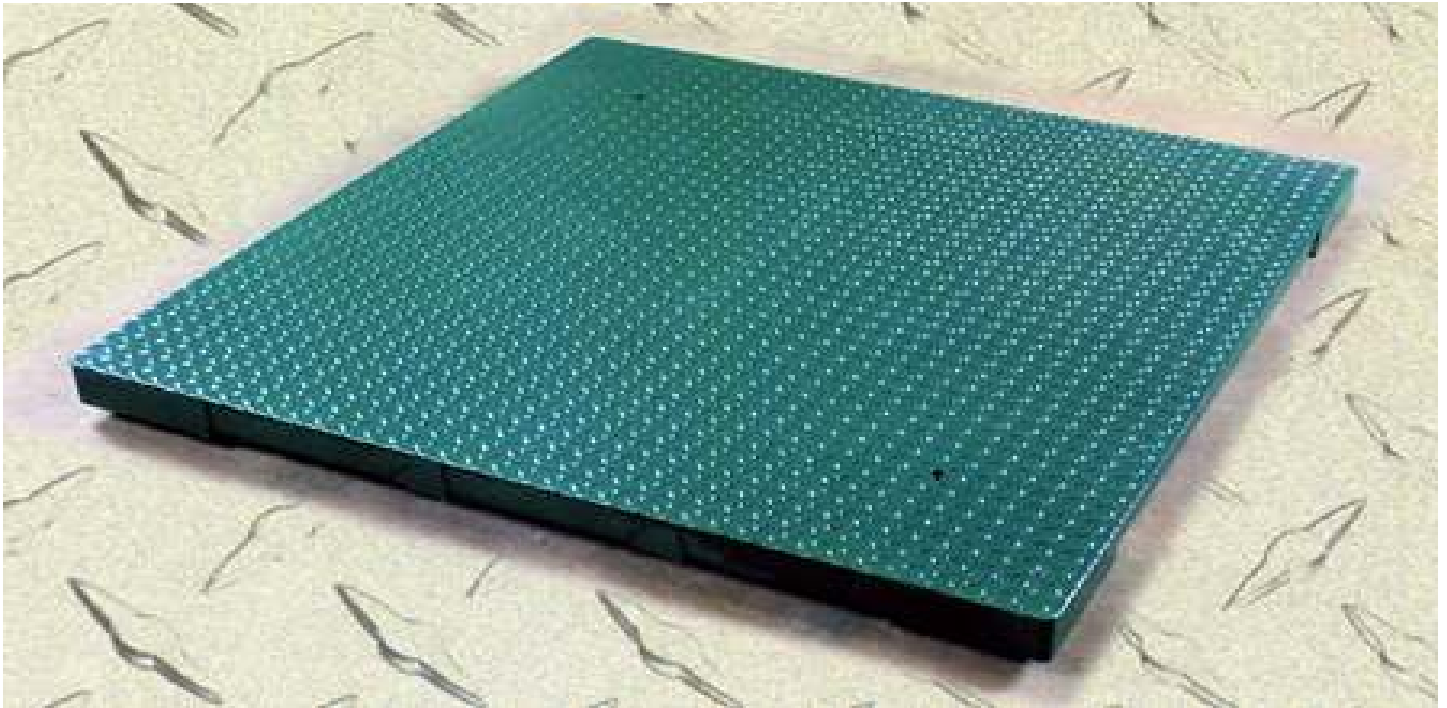

UNIQUE FEATURES:

- Diamond tread-plate safety deck
- 4 NTEP, OIML R60 approved shear beam load cell
- Factory Mutual approved load cells
- Reinforced high strength construction
- Signal trim summing board
- Rigid structure steel channel frame
- RS232C serial port is standard accessory (except FB530 & ED200)
- Steel ball bearings adjustable foot assemblies leveling uneven floor

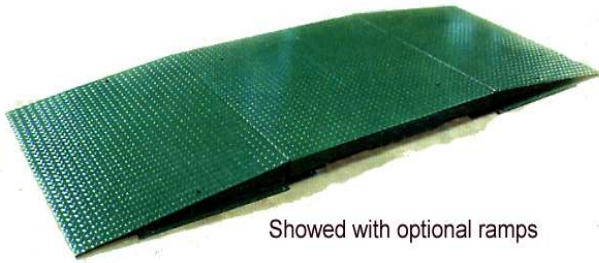

Shown with optional ramps

R320



R420 / N420



FB530



ED200



GSE460/GSE350



ED400n



DL500s



CI201A



Specifications:

MODEL	ED200-1000K FB530-1000K ED400n-1000K DL500s-1000K	ED200-2000K FB530-2000K ED400n-2000K DL500s-2000K	ED200-2000KL FB530-2000KL ED400n-2000KL DL500s-2000KL	ED200-5000K FB530-5000K ED400n-5000K DL500s-5000K
Capacity	1000 Kg	2000 Kg	2000 Kg	5000 Kg
Resolution	0.2 Kg	0.5 Kg	0.5 Kg	1 Kg
Platform Size	1200 x 1200 mm		1500 x 1500 mm	1500 x 1500 mm
Linearity	+/- 2 division			
Display	LED (ED200, ED400n, DL500S) ; LCD (FB530)			
Operating Temperature	-10°C ~ 40°C / 14° ~ 104°F			
Enclosure (Indicator)	Stainless steel (DL500S) ; ABS (ED200, FB530, ED400n)			
Power	220VAC 50/60Hz			

MODEL	GSE-350/460-1200K R320-1200K N420-1200K CI201A-1200K	GSE-350/460-2500K R320-2500K N420-2500K CI201A-2500K	GSE-350/460-2500KL R320-2500KL N420-2500KL CI201A-2500KL	GSE-350/460-3000K R320-3000K N420-3000K CI201A-3000K
Capacity	1200 Kg	2500 Kg	2500 Kg	3000 Kg
Resolution	0.2 Kg	0.5 Kg	0.5 Kg	0.5 Kg
Platform Size	1200 x 1200 mm		1500 x 1500 mm	1200 x 1200 mm
Linearity	+/- 2 divisions			
Display GSE-460 GSE-350 R320 / N420	Primary 19mm, 6 active digit vfd, secondary 10 character dot metric vfd for status indicator 6-digit weight display, 0.8"(22mm) height LED enunciators for operational status LED Backlit LCD with six 20mm high digits with units and annunciators			
Operating Temperature	-10°C ~ 40°C / 14° ~ 104°F			
Weight (Approx.)	120 Kg		170 Kg	120 Kg
Enclosure (Indicator)	Stainless steel washdown (GSE350/460); ABS (R320, N420)			
Power	90-250 VAC @ .5 Amp universal switching supply (GSE350/460) 6 x AA batteries or AC/DC adaptor (R320 / CI200) ; AC/DC adaptor (N420)			

MODEL	GSE-350/460-3000KL R320-3000L N420-3000KL CI201A-3000KL	GSE-350/460-5000K R320-5000K N420-5000K CI201A-5000K	GSE-350/460-10000K R320-10000K N420-10000K CI201A-10000K	GSE-350/460-10000KL R320-10000KL N420-10000KL CI201A-10000KL
Capacity	3000 Kg	5000 Kg	10000 Kg	10000 Kg
Resolution	0.5 Kg	1 Kg	2 Kg	2 Kg
Platform Size	1500 x 1500 mm	1500 x 1500 mm	1500 x 1500 mm	1500 x 2000 mm
Linearity	+/- 2 divisions			
Display GSE-460 GSE-350 R320 / N420	Primary 19mm, 6 active digit vfd, secondary 10 character dot metric vfd for status indicator 6-digit weight display, 0.8"(22mm) height LED enunciators for operational status LED Backlit LCD with six 20mm high digits with units and annunciators			
Operating Temperature	-10°C ~ 40°C / 14° ~ 104°F			
Power	90-250 VAC @ .5 Amp universal switching supply (GSE350/460) 6 x AA batteries or AC/DC adaptor (R320 / CI200) ; AC/DC adaptor (N420)			

Specifications subject to change for improvement without notice

For other platform sizes and capacities, please consult the factory. All stainless steel structure and load cells (IP68) available.

Options: Scale printer (GSE460, GSE350, N420, R320, ED400n, DL500S, CI200 only)
Label printer (GSE460 only)
Remote display
Low angle ramp & Quick pit frame



Weightronic Technology Ltd.

G/F., 34 Nam Cheong Street, Sham Shui Po, Kln., Hong Kong
Tel: (852) 2381 8818 Fax: (852) 2391 9919

Email: sales@weightronic.com <http://www.weightronic.com> <http://www.磅.hk>